



LAMINATES

The Standards

Nothing short of standard-setting, our collection of laminates continues to evolve. With colors and patterns that complement a spectrum of design genres, The Standards group of high-performance, high-style options turns any idea into striking reality. The long-lasting laminates offer impeccable function and timeless beauty. Whichever you choose, The Standards' innovative line of colors, textures and patterns will anchor your design with exceptional durability and aesthetic appeal. Wilsonart Contract/Standard designs are available immediately from local stock.

Factory Specials

Special, yes. Unique, absolutely. These distinctive designs celebrate smart thinking and a pure aesthetic, transforming any environment into a place of function and style. These designs are available from our factory in two to three weeks.

Custom Laminates

Sometimes you just want to make a mark. Thanks to Custom Laminate you can revel in your creative spirit. Now laminate becomes a whole new kind of canvas for your imagination. From corporate IDs to themed environments, the possibilities are endless. You provide the idea. We do the rest. It's the purest form of self-expression.

Metals

For sheen and just a bit of flash, consider these shimmering surfaces. In sheets of solid aluminum, steel or A-look mirror quality, these 21 variations will infuse any space with light and shine. The metals are a stunning accent, adding color and reflection to vertical interior or ceiling applications.

Metalaminates™

Looks that kill. Prices that won't. Metalaminates™ from Wilsonart. All the style of metal. All the flexibility of laminate. Manufactured with an aluminum or stainless steel metal foil that's thermally fused to the phenolic backer, Metalaminates™ boast the workability of HPL for most fabricators. People won't stop staring. Of course, that's what you can expect when you've got the look.

High Definition

Start with the detail, the appearance of depth and texture, the flow of color, the play of light and shadow. Twenty-first century science and design have come together to create totally new laminate surfaces that challenge easy description or comparison. WilsonartHD High Definition Laminate is all about drama and surprise – deep, luxurious looks that intrigue the eye and invite the fingertips, delighting you from the first moment, pleasing you every day, and stopping your guests in their tracks. Drawing on technologies first developed for laminate flooring, WilsonartHD High Definition Laminate delivers three times the wear-resistance of the industry standard. It's the performance you've come to expect from laminate, dramatically multiplied. These are luxurious looks you can feel at home with. Cook, clean, raise children, spill, splash, live in your kitchen, without a moment's worry. Highly resistant to wear and impact, WilsonartHD countertops are also nonporous - there's no need for sealing and re-sealing as with other, more costly materials. WilsonartHD features subtle variations in matte and gloss finish that make visual connections to nature's own stone and mineral surfaces, whether rough and weathered, or smooth and polished. Warm to the touch, with designs and textures unavailable in other luxury materials, WilsonartHD is a welcome alternative; there is simply no other surface like it. And one more dramatic surprise -- WilsonartHD is a surprising value when compared to other luxury surfaces. In fact, this may be the most affordable luxury you'll ever make your own.

Decorative Edges

Take your worktops to a higher level of sophistication with Decorative Edges, sculpted finishings that enhance the look of any laminate surface. Whether a rounded or beveled design, a polished edge lends high-end detail and a feeling of luxury.

See more info on Wilsonart
Decorative Surfacing Products in our
Featured Products Section starting
on page 128.

Visit us on the web at www.unitedplywoods.com


Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024



HIGH PRESSURE LAMINATES AEON™ Enhanced Performance

What is AEON?

The new AEON™ Enhanced Performance process is not just a new coating or finish. It is a new way of making high pressure laminate that results in finer and more accurately layered aluminum oxide particles. The result is a surface that is measurably clearer and stronger, a surface that looks better when new, and looks new longer.

The name AEON was selected to reinforce attributes and perceived benefits of the technology:

- Performance
- Clarity
- Innovation
- Endurance

The Science Behind AEON

The AEON technology revolutionizes the way that aluminum oxide is applied to the laminate surface.

- Aluminum oxide particles are dispersed in the melamine resin and applied to the surface of the overlay during treating.
 - Allows the aluminum oxide particles to be positioned for maximum performance.
 - The overlay can be thinner, enhancing the optical clarity of the design.
- Two testing methodologies are used to demonstrate the enhanced performance:
 - Taber abrasion: traditional NEMA test for wear resistance; measure the number of cycles it takes for sandpaper disk to wear through the décor layer to the kraft layer (what we call “catastrophic surface failure”).
 - Wilsonart HD designs will carry elevated taber abrasion levels of 1600 cycles (4 times industry standard).
 - Premiums will be elevated to 1200 cycles (3 times industry standard).
 - “Scotch-Brite” test – created by Wilsonart R&D to measure scratch/scuff/mar (the “ugly out effect”) produces more consistent results from test to test.
 - 100 back-and-forth passes of a weighted, industrial-grade Scotch-Brite pad on the surface.
 - Measures “gloss reduction” on the surface. AEON technology improves HPL performance 3 to 5 times over our previous process.

AEON Attributes

- All field tests indicate that fabricators should not encounter more tool wear when fabricating laminate with AEON versus current premium laminates from Wilsonart.
- HPL postforming qualities, temperatures and procedures will not be affected by the introduction of AEON technology.
- Wilsonart Laminates with AEON technology will not be negatively affected with chipping, brittleness, staining or clothing wear (as was experienced with a competitive wear-resistant surface).
- AEON overlay will be used on the following standard product types: 107, 350, 335, and 376.
- AEON will carry our standard 1 year materials warranty.

Things to remember about AEON

Wilsonart Premiums and HD with AEON offer not only a higher level of appearance, but also a higher level of performance.

- Less waste/damage in processing
- Better performance married with the best-looking designs in the industry.

Finishes Using AEON

01, 07, 52, 35, 45, and 78.

Contact your representative for complete information and availability.

Visit us on the web at www.unitedplywoods.com


Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468


Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024

 Wilsonart Laminate

PRODUCT GRADE CODES

Grade No.	Description	Thickness In.
101	Cabinet liner	0.02
107	General purpose	0.05
136	Markerboard perf. gd. lam.	0.048
174	Digital print	0.048
202	Backer	0.02
203	Backer	0.03
207	Backer	0.05
264	Fire-rated backer	0.03
266	Fire-rated backer	0.05
335	Vertical surface	0.03
336	Markerboard	0.03
350	Postforming	0.04
376	Wilsonart HD	0.04
390	Chemical resistant	0.036
401	A-Look mirror metal	0.079
408	Metalamines	0.032
414	Galvalume steel	0.019
416	Artisan group	0.025
418	Metals - w/ backer	0.046
419	Metals - w/o backer	0.025
604	Fire retardant	0.036
605	Fire retardant	0.05
607	Fire retardant	0.063
726	Cabinet liner	0.02

FINISH CODES

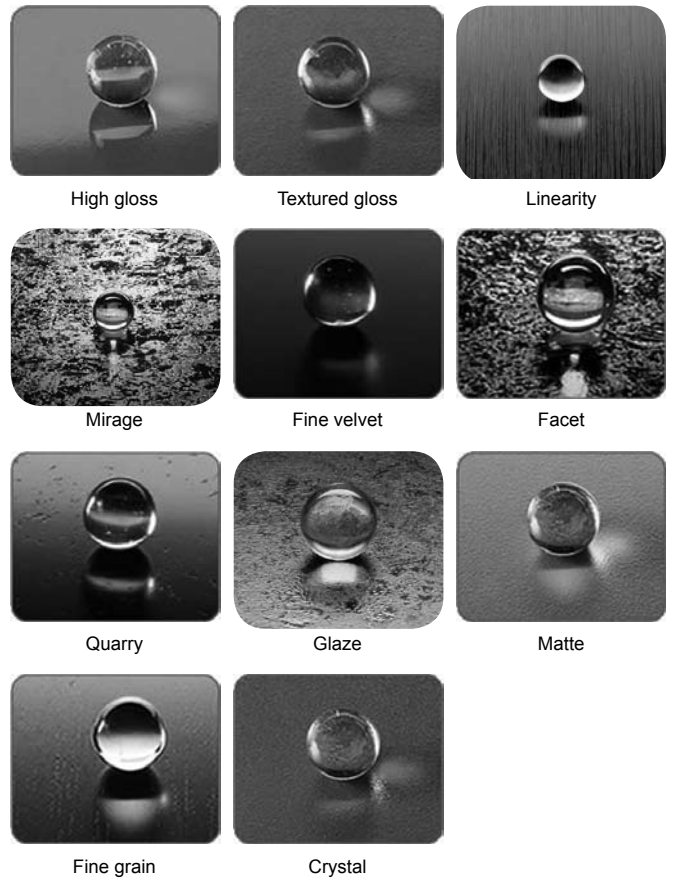

DECORATIVE SURFACING

Finish No.	Description
01	High gloss
07	Textured gloss
18	Linearity
35	Mirage
38	Fine velvet
45	Facet
52	Quarry
55	Glaze
60	Matte
78	Fine grain
90	Crystal

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024

Wilsonart Laminate

CHEMICAL-RESISTANT LAMINATES

Chemsurf®



Chemsurf®

For use in horizontal, vertical and postforming surface applications. Resists harsh acids, bases and solvents. Greenguard® indoor air quality certified. ASTM G-22 compliant. Available in 30 colors and patterns.

Available in 4' or 5' widths, and 8', 10' or 12' lengths. Contact United for more details.

FIRE-RATED LAMINATES



Fire-Rated

For use in furniture, cabinetry, fixture cladding, wall panel and room divider applications. Features fire-retardant treated kraft phenolic core. Class I/A fire-rated. Greenguard® indoor air quality certified. Meets ASTM E-84 and UL No. 723 specifications, US Federal specifications for government facilities, and FAA 25.853 Federal Aviation Administration specifications. ANSI and NEMA compliant.

Available in gloss or matte finish, in 4' x 8' or 4' x 12' sheet sizes. Contact United for more details.

MARKER BOARD LAMINATES



Marker Board

For use as writing and projection board surfaces, message boards, cafeteria menus, and panel systems in conference rooms, day care centers and pediatric wards. Features dry erase surface for easy clean-up. Gloss finish in soft or frosty white. Class II/B fire-rated. Greenguard® indoor air quality certified. Meets US Federal specifications for government facilities. ANSI and NEMA compliant.

Available in 4' x 8' or 4' x 12' sheet sizes. Contact United for more details.

CABINET LINER



4' x 8' Sheets. Sold individually.

Item #	Description
84895	#3173 White

PHENOLIC BACKER SHEETS



5' x 12' Sheets. Sold individually

Item #	Description
84903	#203 Brown

COUNTERTOP POLISH



Cleans, polishes and hides light scratches. Helps protect the surface from staining/scratching and adds a luster that improves appearance. Use on decorative laminate, solid surface material and numerous other surfaces. Non-toxic, non-abrasive, non-flammable and easy to apply. 12 Per box. Sold individually.

Item #	Size
HO-8CTP	8 Oz.

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024

**LAMI-LUBE
LUBRICANTS**



High pressure laminate lubricant. Fast, easy, no cleaning. The perfect spray-on lubricant for routing all types of high pressure laminated plastics. Prevents burns and scratches caused by self guiding cutter. Will hide and aid in preventing minor surface scratches on high pressure laminated plastics. 12 Per box. Sold Individually.

Item #	Oz.
LAMILUBE	10.5

**FILES
PLASTI-CUT®**



Designed and manufactured specifically for maximum performance on decorative laminates. PLASTI-CUT® files save time, effort, and money by cutting faster and easier, and by lasting longer than ordinary files. Extra sharpness and hardness provide a long life of clean, fast filing. Select the MILL files for the smoothest finish, the FAST® files for a more coarse file. The Duplex file offers one side MILL and the opposite side FAST® for added convenience. Sold Individually.

Item #	Description	Box Qty
PC-10M	10" Mill File	10
PC-12M	12" Mill File	5
PC-14M	14" Mill File	5
PC-10DX	10" Duplex File	10
PC-10F	10" Fast File	10
PC-12F	12" Fast File	5
PC-14F	14" Fast File	5

LAMINATE SLITTER

Tridon



A great tool for cutting high pressure laminate strips. Two hardened steel rolling cutters score both sides of the sheet allowing the strip to be broken off easily by hand. Edge guide adjusts to cut strips from 1/2" to 4-5/16" wide. Sold individually.

Item #	Description
AT-109	Slitter

LAMINATE SHEARS

Tridon



The most popular hand shear for cutting laminate. Three jaw design cuts without chipping. Make long or short cuts without trips to the saw. Very useful for quick cuts and fitting on the job. Sold individually.

Item #	Description
LS-85A	Hand-held laminate shears

J-ROLLER



The handiest roller of all. The 3" rubber roller is soft enough to avoid marring but firm enough to smooth out all covering materials, and is conductive enough to prevent static build up. Up to 50 lb per square inch can be applied to assure thorough bonding of the adhesive layer. Since there are no axle protrusions on the open end, you can roll close to uprights without danger of marring. Light-weight with comfort grip handle. 24 Pcs per box. Sold individually.

Item #	Size In.
JR-78C	13

DECORATIVE SURFACING

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468


Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024

J-ROLLER - CURVED FRAME



This heftier version J-Roller is 14-1/2" long. The curved steel frame provides left-hand clearance and permits the application of greater pressure. Two heavy non-slip vinyl hand grips provide firm control. 12 Pcs per box. Sold individually.

Item #	Size In.
JR-300	15



SOLID SURFACE ACCESSORIES

Item #	Description
Heat Reflective Tape	
95015	Heat reflective tape 2-1/2" x 36 yards
Seam Kit Adhesives	
WA 8215	10 oz. Seam kit adhesive for Wilsonart Solid Surface
Seam Kit Tools	
95011	Style static mixer tip
95010	10 oz. Adhesive dispensing gun



SILICONE SEALANTS

Axiom 25™



100% translucent silicone. For use with all solid surface products, marble, engineered stone and other nonporous surfaces. Ideal for fastening and sealing back splashes, window sills and tub/shower surrounds. Also for creating hygiene seals in refrigeration and food preparation applications. Fast-curing. Resists UV exposure, ozone, moisture and mildew. Can be dispensed in temperatures from -35°F to 160°F. Packaged in 10.3 oz. cartridge. 12 Per box. Sold individually.

Item #	Color
89890	Blue
89891	Charcoal
89892	Green
89894	Gray
89895	Beige
89898	White

See more info on Wilsonart Solid Surface Products in our Featured Products Section starting on page 128.

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024



Solid Surface Sanding and Finishing



When finishing Solid Surfaces, the right combination of technique, tools, abrasives will achieve superior results.

1. Technique

Begin by sanding from left to right (making sure to overlap your passes) then sand from front to back. After the surface has been sanded in both directions, sand in a circular motion **clockwise** (following rotation of the sander) in an 8"-10" circle. This circular motion makes the finish more even and reduces the checkerboard effect. In order to avoid swirl marks in your finish, it is very important to sand along the rotation of the pad. If you sand against the rotation of the pad you face the likelihood of getting swirls in the finish.

To improve finish results remove any sanding dust or residue before proceeding to the next grit. This dust is the same size as the last grit that was used, and the dust will be coarser than the next sanding grit and will thus hinder your progress toward the perfect finish.

For polishing high gloss finishes, (see below), follow this same method. Again, it is important to remove all compounds from the surface before moving on to the next step.

Seams may be taken down with either 80 or 120 grit Titan II abrasive. When sanding a seam, the Rotex sander should be used in Rotex mode (coarse sanding) up to 120 grit. With grits of 150 and above, it is recommended that you switch to Random Orbital mode (fine sanding). Feather out the seam, overlapping with successive grits to achieve a uniform finish.

DECORATIVE SURFACING

2. Abrasives for Solid Surface Fabrication

	Light Colored Surface Type/order of Grit	Dark Colored Surface Type/order of Grit
Matte Finish	Titan II - 120, 150, 180, Vlies 280	Titan II - 120, 150, 180, 220, Vlies 800
Satin Finish	Titan II - 120, 150, 180, 220, 320, Vlies 800	Titan II - 120, 150, 180, 220, 320, 400, Platin 500
Semi Gloss Finish	Titan II - 120, 150, 180, 220, 320, 400, Platin 500	Titan II - 120, 150, 180, 220, 320, 400, Platin 500, 1000
Light and Dark Colored Surface - Type/Order of Grit		
Gloss Finish	Titan II - 120, 150, 180, 220, 320, 400, Platin 500, 1000, 2000, 4000	
High Gloss Finish	Same grit sequence as the Gloss finish above. Follow sanding process by applying compounds with felt pads mounted on the polishing pad. Use sander in the gear driven Rotex mode on high speed for coarse sanding and polishing and move to low to medium speed (1-3) using the following pads and compounds: <ul style="list-style-type: none"> • Hard felt - Rubbing compound (Marine grade) • Soft felt - 3M Finess-It II • Wool pad - Liquid glass 	

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024

Tools for Solid Surface



From start to finish, Festool has the right tools for cutting, forming, and sanding solid surface material.

3. Tools for Solid Surface Fabrication

TS Plunge Saw

Panel saw precision with greater flexibility in a portable system. Festool TS saws and guide rail systems can be used to cut sheets down to size, rip material for build ups, backsplashes, and aprons. Festool saws feature super efficient dust extraction, guided cutting, and exceptional finish cuts. Built for dust extraction, durability, and precision, there is no better way to process large sheet goods, cut bevels and angles, and trim pieces to fit.

Rotex Sander

An all-in-one sanding tool from seam to finish, matte to high gloss. The Rotex sander features two modes of operation; a gear mode for fast seam take down and scribing, and random orbit mode to feather out seams and sanding decks. The Rotex can also be used for polishing high gloss finishes using sponges, felts, and sheep-skin bonnets. Rotex sanders feature 99% dust extraction, reducing clean-up between grits, extending pad and abrasive life. This results in cleaner air, and a cleaner install, keeping your customer's home in good shape throughout the job.

OF Routers

Dust extraction, precision, and controllability are designed into each of the Festool routers. Dust extraction for plunge cuts and edge forming tasks reduces clean-up time and improves visibility during cuts. *Precision to 1/10 mm (1/256") for critical cuts and seams.* Soft start enables controlled cutting from the start.

CT Dust Extractors

Tool-triggered dust extraction. CT dust extractors are ideal for shop or on-site dust extraction for sawing, sanding, and routing. With automatic and manual modes of operation, they also double as a site clean-up tool. Built for performance and durability, CT dust extractors feature hoses that are compatible with all Festool products. These anti-static hoses that don't attract solid surface dust or provide nasty shocks, and are kink resistant. CT 22 & 33 units come standard with HEPA filters standard for efficient air filtration to .3 microns. Festool dust extractors come standard with a docking station for Systainers, providing convenient storage and easy transport.

DX 93

Detail-oriented, with power and finesse. The DX 93 is a gear-driven, small sander for getting into the corners of a cove backsplash, or for going around existing fixtures. The DX 93 features a triangular pad with hook and loop pad elements for fast abrasive and pad replacement combined with efficient dust extraction. The sanding motion enables full pad contact for maximum surface coverage leading to better results. A tool for in the shop and on the site.



Festool USA/Tooltechnic Systems, LLC
 400 N. Enterprise Blvd. Lebanon, IN 46052
 Phone: 888.337.8600
 Fax: 888.550.6425
 www.festoolusa.com

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
 1640 Mims Ave. SW
 Ph: 205-925-7601
 Fax: 205-925-1315
 800-272-6486

Decatur, AL
 723 Old Trinity Road
 Ph: 256-355-3161
 Fax: 256-355-0073
 800-321-6886



Mobile, AL
 5445 Business Parkway
 Ph: 251-378-0188
 Fax: 251-378-0190
 877-531-7468

Montgomery, AL
 581 Trade Center Street
 Ph: 334-265-6721
 Fax: 334-265-6725
 800-392-8024



METAL LAMINATES

400-T Series - Tints

For interior use, including vertical and light-duty horizontal applications. Can be cut, routed and drilled with standard woodworking or metalworking equipment. Aluminum base. Features clear vinyl mask to protect finish during fabrication.

Available Colors

Plum, Blue, Moss, Real Red, Amber, Blush, Chartreuse, Gulf Blue, Slate Blue, Fuchsia and Cider.

Available Metal Laminate Patterns

452 Ribbon, 440 Crescendo, 427 Placid, 413 Linear, 444 Feathered and 451 Serpentine.

96" x 48" sheet; 413 Linear, 427 Placid and 444 Feathered also available in 120" x 48".

Call your local branch for complete information and a Chemetal catalog.

Technical Information

Chemetal laminates are recommended for interior use only on vertical and light-duty horizontal surfaces. Please contact us regarding any uncertainty regarding the use of our product in an application. More complete technical information on storage, lamination, machining, cutting and cleaning may be found at www.chemetalco.com

Laminate	Size		Base Metal	Thickness/Backer		
	96" x 48"	120" x 48"		HPL	Phenolic	Solid Metal
100 Series	●	●				
101 Windows	●		Aluminum			.025
102 Micro-Steel	●		Aluminum			.025
103 Grille	●		Aluminum			.025

100 Series Weight -- .30 LBS per square foot.

Laminate	Size		Base Metal	Thickness/Backer		
	96" x 48"	120" x 48"		HPL	Phenolic	Solid Metal
200 Series	●	●				
211 Sunburst	●		Copper	.055		
213 Lunaria	●		Aluminum	.055		
214 Diamondback	●		Aluminum	.055		
216 Footplate	●		Aluminum	.055		
217 Reptilian	●		Copper	.055		
218 Cobblestone	●		Copper	.055		
220 Venetian Wave	●	●	Aluminum	.055		
221 Argenta	●		Aluminum	.055		
223 Chromium	●		Aluminum	.055		
226 Venetian Vertical	●	●	Aluminum	.055		
227 Venetian Horiz.	●	●	Aluminum	.055		
230 Moonscape	●		Copper	.055		
233 Honeycomb	●		Aluminum	.055		
238 Autumn Leaves	●		Copper	.055		
241 Sienna	●		Copper	.055		
244 Pewter Wave	●		Aluminum	.055		
251 Sonoma	●		Copper	.055		
253 Metropolis	●		Aluminum	.055		
258 Titania	●		Aluminum	.055		
260 Champagne	●		Aluminum	.055		
262 Red Rock	●		Copper	.055		
263 Copper Cityscape	●		Copper	.055		
264 Pewter Vines	●		Aluminum	.055		
267 Wanderlust	●		Aluminum	.055		
268 Extrovert	●		Aluminum	.055		
269 Apollo	●		Aluminum	.055		
270 Fossil	●		Aluminum	.055		
272 Venetian Copper	●		Aluminum	.055		
273 Venetian Stainless	●		Aluminum	.055		

200 Series Weight -- .42 LBS per square foot

DECORATIVE SURFACING

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024



300 Series Weight
 .344 LBS per square foot
 except 310 and 325 –
 .706 LBS per sq ft and
 333 – .284 LBS per sq ft.
 Add .188 LBS per sq ft to
 the solid metal weight to
 determine weight of item
 with low pressure phenolic
 back.

Laminate	Size				Base Metal	Thickness/Backer		
	96" x 24"	120 x 24"	96" x 48"	120" x 48"		HPL	Phenolic	Solid Metal
300 Series								
309 Estruscan B			●	●	Brass	.043	.044	
310 Antique Brushed	●	●			Brass		.044	.016
313 Renaissance			●	●	Copper	.043		
314 Mayan			●	●	Copper	.043		
315 Canterbury			●	●	Copper	.043		
317 Aurora			●	●	Copper	.043		
318 Essex			●	●	Copper	.043		
325 Statuary	●	●			Brass		.044	.016
327 Melrose w/seam			●	●	Brass	.043		
328 Caramel w/seam			●	●	Brass	.043		
333 Franklin			●	●	Aluminum		.05	.02
340 Monet			●	●	Copper	.043		
343 Meteor			●	●	Copper	.043		
344 Striations			●	●	Copper	.043		
345 Copper Crackle			●	●	Copper	.043	.05	.02
346 Graphite			●	●	Aluminum		.05	.02
347 Granite Chief			●	●	Aluminum		.05	.02

400 Series Weight
 .284 LBS per
 square foot.
 #423 Swirled
 Copper .756 LBS
 per square foot.
 Add .188 LBS per
 sq ft to the solid
 metal weight to
 determine weight
 of item with low
 pressure phenolic
 back.
 Add .122 LBS per
 sq. ft. to the solid
 metal weight to
 determine weight
 of item with high
 pressure phenolic
 back.

Laminate	Size				Base Metal	Thickness/Backer		
	96" x 24"	120 x 24"	96" x 48"	120" x 48"		HPL	Phenolic	Solid Metal
400 Series								
406 Circles			●		Aluminum	.043	.05	.02
407 Kaleidoscope			●		Aluminum	.043	.05	.02
413 Linear			●	●	Aluminum	.043	.05	.02
414 Nomadic			●	●	Aluminum		.05	.02
417 Nomadic Antiqued			●	●	Aluminum		.055	.025
420 Cascade			●	●	Aluminum		.05	.02
423 Swirled Copper	●	●			Copper		.042	.02
427 Placid			●	●	Aluminum	.043	.05	.02
440 Crescendo			●	●	Aluminum	.043	.05	.02
443 Plume			●	●	Aluminum		.05	.02
444 Feathered			●	●	Aluminum	.043	.05	.02
449 Ripple			●		Aluminum		.05	.02
450 Cyclone			●		Aluminum		.05	.02
451 Serpentine			●		Aluminum		.05	.02
452 Ribbon			●		Aluminum		.05	.02
453 Stripes			●		Aluminum		.05	.02
454 Fireworks			●		Aluminum		.05	.02
455 Crazy Eights			●		Aluminum		.05	.02
456 Twilight			●		Aluminum		.05	.02
457 Bounce			●		Aluminum		.05	.02

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
 1640 Mims Ave. SW
 Ph: 205-925-7601
 Fax: 205-925-1315
 800-272-6486

Decatur, AL
 723 Old Trinity Road
 Ph: 256-355-3161
 Fax: 256-355-0073
 800-321-6886



Mobile, AL
 5445 Business Parkway
 Ph: 251-378-0188
 Fax: 251-378-0190
 877-531-7468

Montgomery, AL
 581 Trade Center Street
 Ph: 334-265-6721
 Fax: 334-265-6725
 800-392-8024



700 Series Weight
.265 - .316 LBS per
square foot.

Laminate	Size				Base Metal	Thickness/Backer		
	96" x 24"	120 x 24"	96" x 48"	120" x 48"		HPL	Phenolic	Solid Metal
700 Series								
701 Polished Aluminum			●	●	Aluminum	.037		
702 Brushed Aluminum			●	●	Aluminum	.037		
703 Polished Brass Alum			●	●	Aluminum	.037		
704 Brushed Lt. Brass Alum			●	●	Aluminum	.037		
706 Satin Copper			●	●	Copper	.037		
710 Brushed Stainless	Available in 96" x 40" size only.				Steel	.037		
719 Satin Silver			●	●	Aluminum	.037		
727 Lt. Stainless Steel			●	●	Aluminum	.037		
799 Natural Brushed Alum.			●	●	Aluminum	.037		

DECORATIVE SURFACING

NEED HELP WITH SPECIFICATIONS?

OUR KNOWLEDGEABLE STAFF WILL BE HAPPY TO ASSIST YOU!

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024



800 Series Weight
 .706 - .744 LBS per square foot.
 Add .188 LBS per sq. ft. to the solid metal weight to determine weight of item with low pressure phenolic back.

800 Series	96" x 24"	120 x 24"	96" x 48"	120" x 48"		HPL	Phenolic	Solid Metal
801 Polished Chrome	●	●			Brass		.042	.016
802 Satin Chrome	●	●			Brass		.042	.016
803 Polished Solid Brass	●	●			Brass		.042	.016
804 Satin Solid Brass	●	●			Brass		.042	.016
806 Satin Solid Copper	●	●			Copper		.042	.016
812 Satin Smoked Chrome	●	●			Brass		.042	.016
814 Satin Golden Bronze	●	●			Bronze		.042	.016

900 Series Weight
 .359 LBS per square foot.
 Add .188 LBS per sq. ft. to the solid metal weight to determine weight of item with low pressure phenolic back.

Laminate	Size		Base Metal	Thickness/Backer		
900 Series	96" x 48"	120" x 48"		HPL	Phenolic	Solid Metal
901 Polished Aluminum	●	●	Aluminum		.055	.025
902 Brushed Aluminum	●	●	Aluminum		.055	.025
903 Polished Brass Alum	●	●	Aluminum		.055	.025
904 Brushed Lt. Brass Alum	●	●	Aluminum		.055	.025
906 Brushed Copper Alum	●	●	Aluminum		.055	.025
908 Satin Black Alum	●	●	Aluminum		.055	.025
909 Satin Silver Alum	●	●	Aluminum		.055	.025
910 Satin Gold Alum	●	●	Aluminum		.055	.025
911 Polished Smoked Alum	●	●	Aluminum		.055	.025
912 Satin Bronze Alum	●	●	Aluminum		.055	.025
914 Cross Hatch Alum	●	●	Aluminum		.055	.025
915 Brushed Brass Alum	●	●	Aluminum		.055	.025
916 Brushed Pewter Alum	●	●	Aluminum		.055	.025
917 Brushed Black Alum	●	●	Aluminum		.055	.025
924 Bronze Stainless Alum	●	●	Aluminum		.055	.025
925 Brushed Med. Brze. Alum	●	●	Aluminum		.055	.025
927 Light Stainless Alum	●	●	Aluminum		.055	.025

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
 1640 Mims Ave. SW
 Ph: 205-925-7601
 Fax: 205-925-1315
 800-272-6486

Decatur, AL
 723 Old Trinity Road
 Ph: 256-355-3161
 Fax: 256-355-0073
 800-321-6886




Mobile, AL
 5445 Business Parkway
 Ph: 251-378-0188
 Fax: 251-378-0190
 877-531-7468

Montgomery, AL
 581 Trade Center Street
 Ph: 334-265-6721
 Fax: 334-265-6725
 800-392-8024



METAL LAMINATE ANODIZED CLASSICS

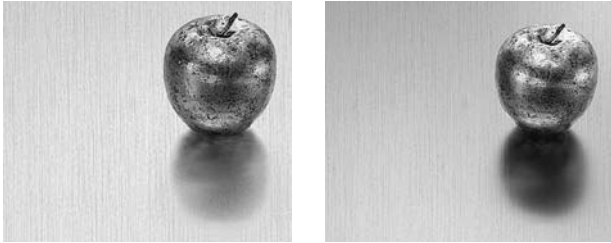

All aluminum, this series combines durability and beauty of solid anodized aluminum. Sold in 4' x 8' sheets.

Item #	Description
60020	#902 Brushed Aluminum
60026	#927 Light Stainless Steel Aluminum

METAL LAMINATE HPL CLASSICS



Metal classics on HPL. Lightweight, durability and HPL backer makes installation most similar to that of standard laminate. Sold in 4' x 8' sheets.

Item #	Description
60000	#702 Brushed Aluminum with Phenolic Back

DECORATIVE SURFACING

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886








Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024

Decorative Thermoplastic and metal laminates for commercial and residential use.



CONTACT YOUR UNITED SALES REPRESENTATIVE
FOR A FULL LINE CATALOG

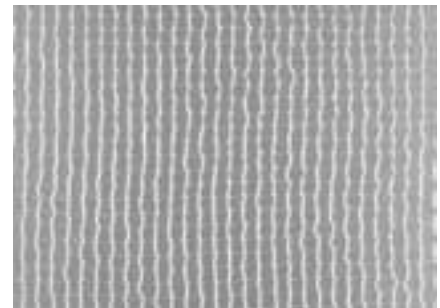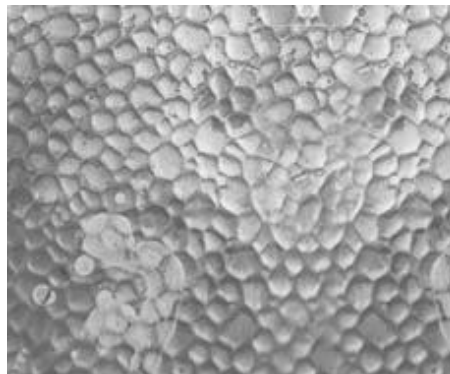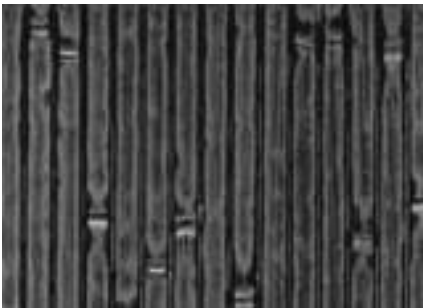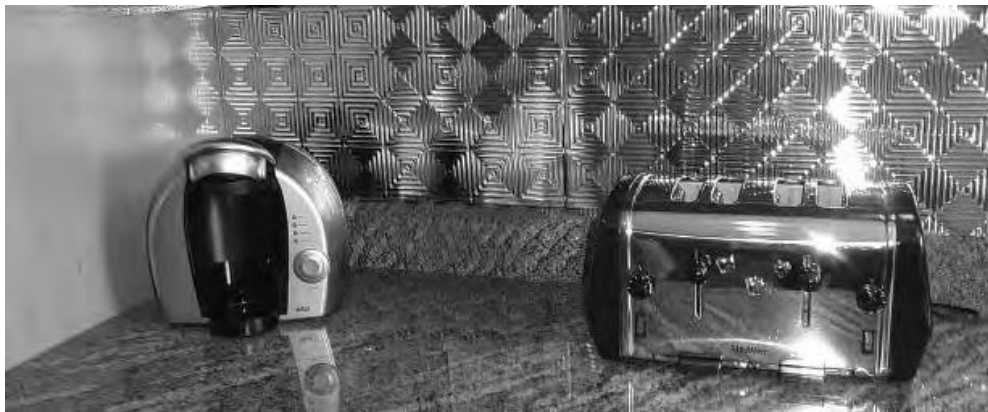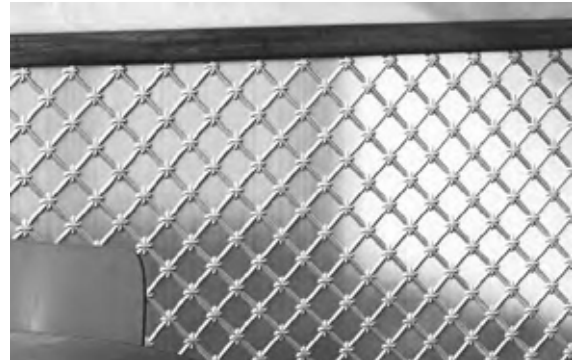

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024



TREEFROG VENEERS



Postformable, furniture-grade wood veneer composite surface with phenolic backer. Polyurethane lacquer finish. 1/32" thick. 4' x 8' sheets. 7/8" bending radius.

Note: Wax effect is comparable to a flat or matte finish.

Item #	Name	Finish
60101	Maple fris�	Gloss
60102	Maple birds eye	Gloss
60104	Maple straight grain	Wax effect
60204	White oak straight grain	Wax effect
60210	Oak decap� crown	Wax effect
60303	Mahogany burl	Gloss
60304	Mahogany straight grain	Gloss
60403	Walnut burl	Gloss
60404	Walnut straight grain	Gloss
60405	American walnut crown	Wax effect
60507	Anigr� figured	Wax effect
60601	Old cherry fris�	Gloss
60602	Cherry birds eye	Gloss
60604	Cherry straight grain	Wax effect
60609	Cherry beeswing	Gloss
60704	Weng� straight grain	Wax effect
60705	Weng� crown	Wax effect
60804	Teak straight grain	Gloss
60812	Teak sabbiata	Wax effect
60904	Zebrawood straight grain	Wax effect
61003	Coffee bubinga burl	Gloss
61104	Ebony straight grain	Wax effect
61112	Ebony sabbiata	Wax effect
61403	Fruitwood burl	Gloss
62005	Macassar B&W crown	Wax effect
62204	Gray oak straight grain	Wax effect
62304	Black oak straight grain	Wax effect
62605	Green willow crown	Wax effect

Item #	Name	Finish
62807	Silver ash figured	Wax effect
62904	Palmwood straight grain	Wax effect
63004	Asian cherry	Wax effect
63103	Sangria bubinga burl	Gloss
63204	Red mahogany straight	Gloss
63304	Weng� gloss	Gloss
63404	Salsawood straight grain	Wax effect
63504	White macassar	Wax effect
63604	Lapiswood straight grain	Wax effect
63804	Sienna birch figured	Wax effect
69500	Weng� intricate	Matte
69501	European cherry intricate	Matte
69502	Black oak herringbone	Matte
69503	Zebrawood herringbone	Matte
69504	Weng� herringbone	Matte
69506	Black walnut square	Matte
69507	Weng� square	Matte
69508	White oak diamond	Matte
69509	Makor� diamond	Matte
69510	Canyonlands	Matte
69511	Escalant�	Matte

DECORATIVE SURFACING

Visit us on the web at www.unitedplywoods.com

Birmingham, AL
1640 Mims Ave. SW
Ph: 205-925-7601
Fax: 205-925-1315
800-272-6486

Decatur, AL
723 Old Trinity Road
Ph: 256-355-3161
Fax: 256-355-0073
800-321-6886



Mobile, AL
5445 Business Parkway
Ph: 251-378-0188
Fax: 251-378-0190
877-531-7468

Montgomery, AL
581 Trade Center Street
Ph: 334-265-6721
Fax: 334-265-6725
800-392-8024

